


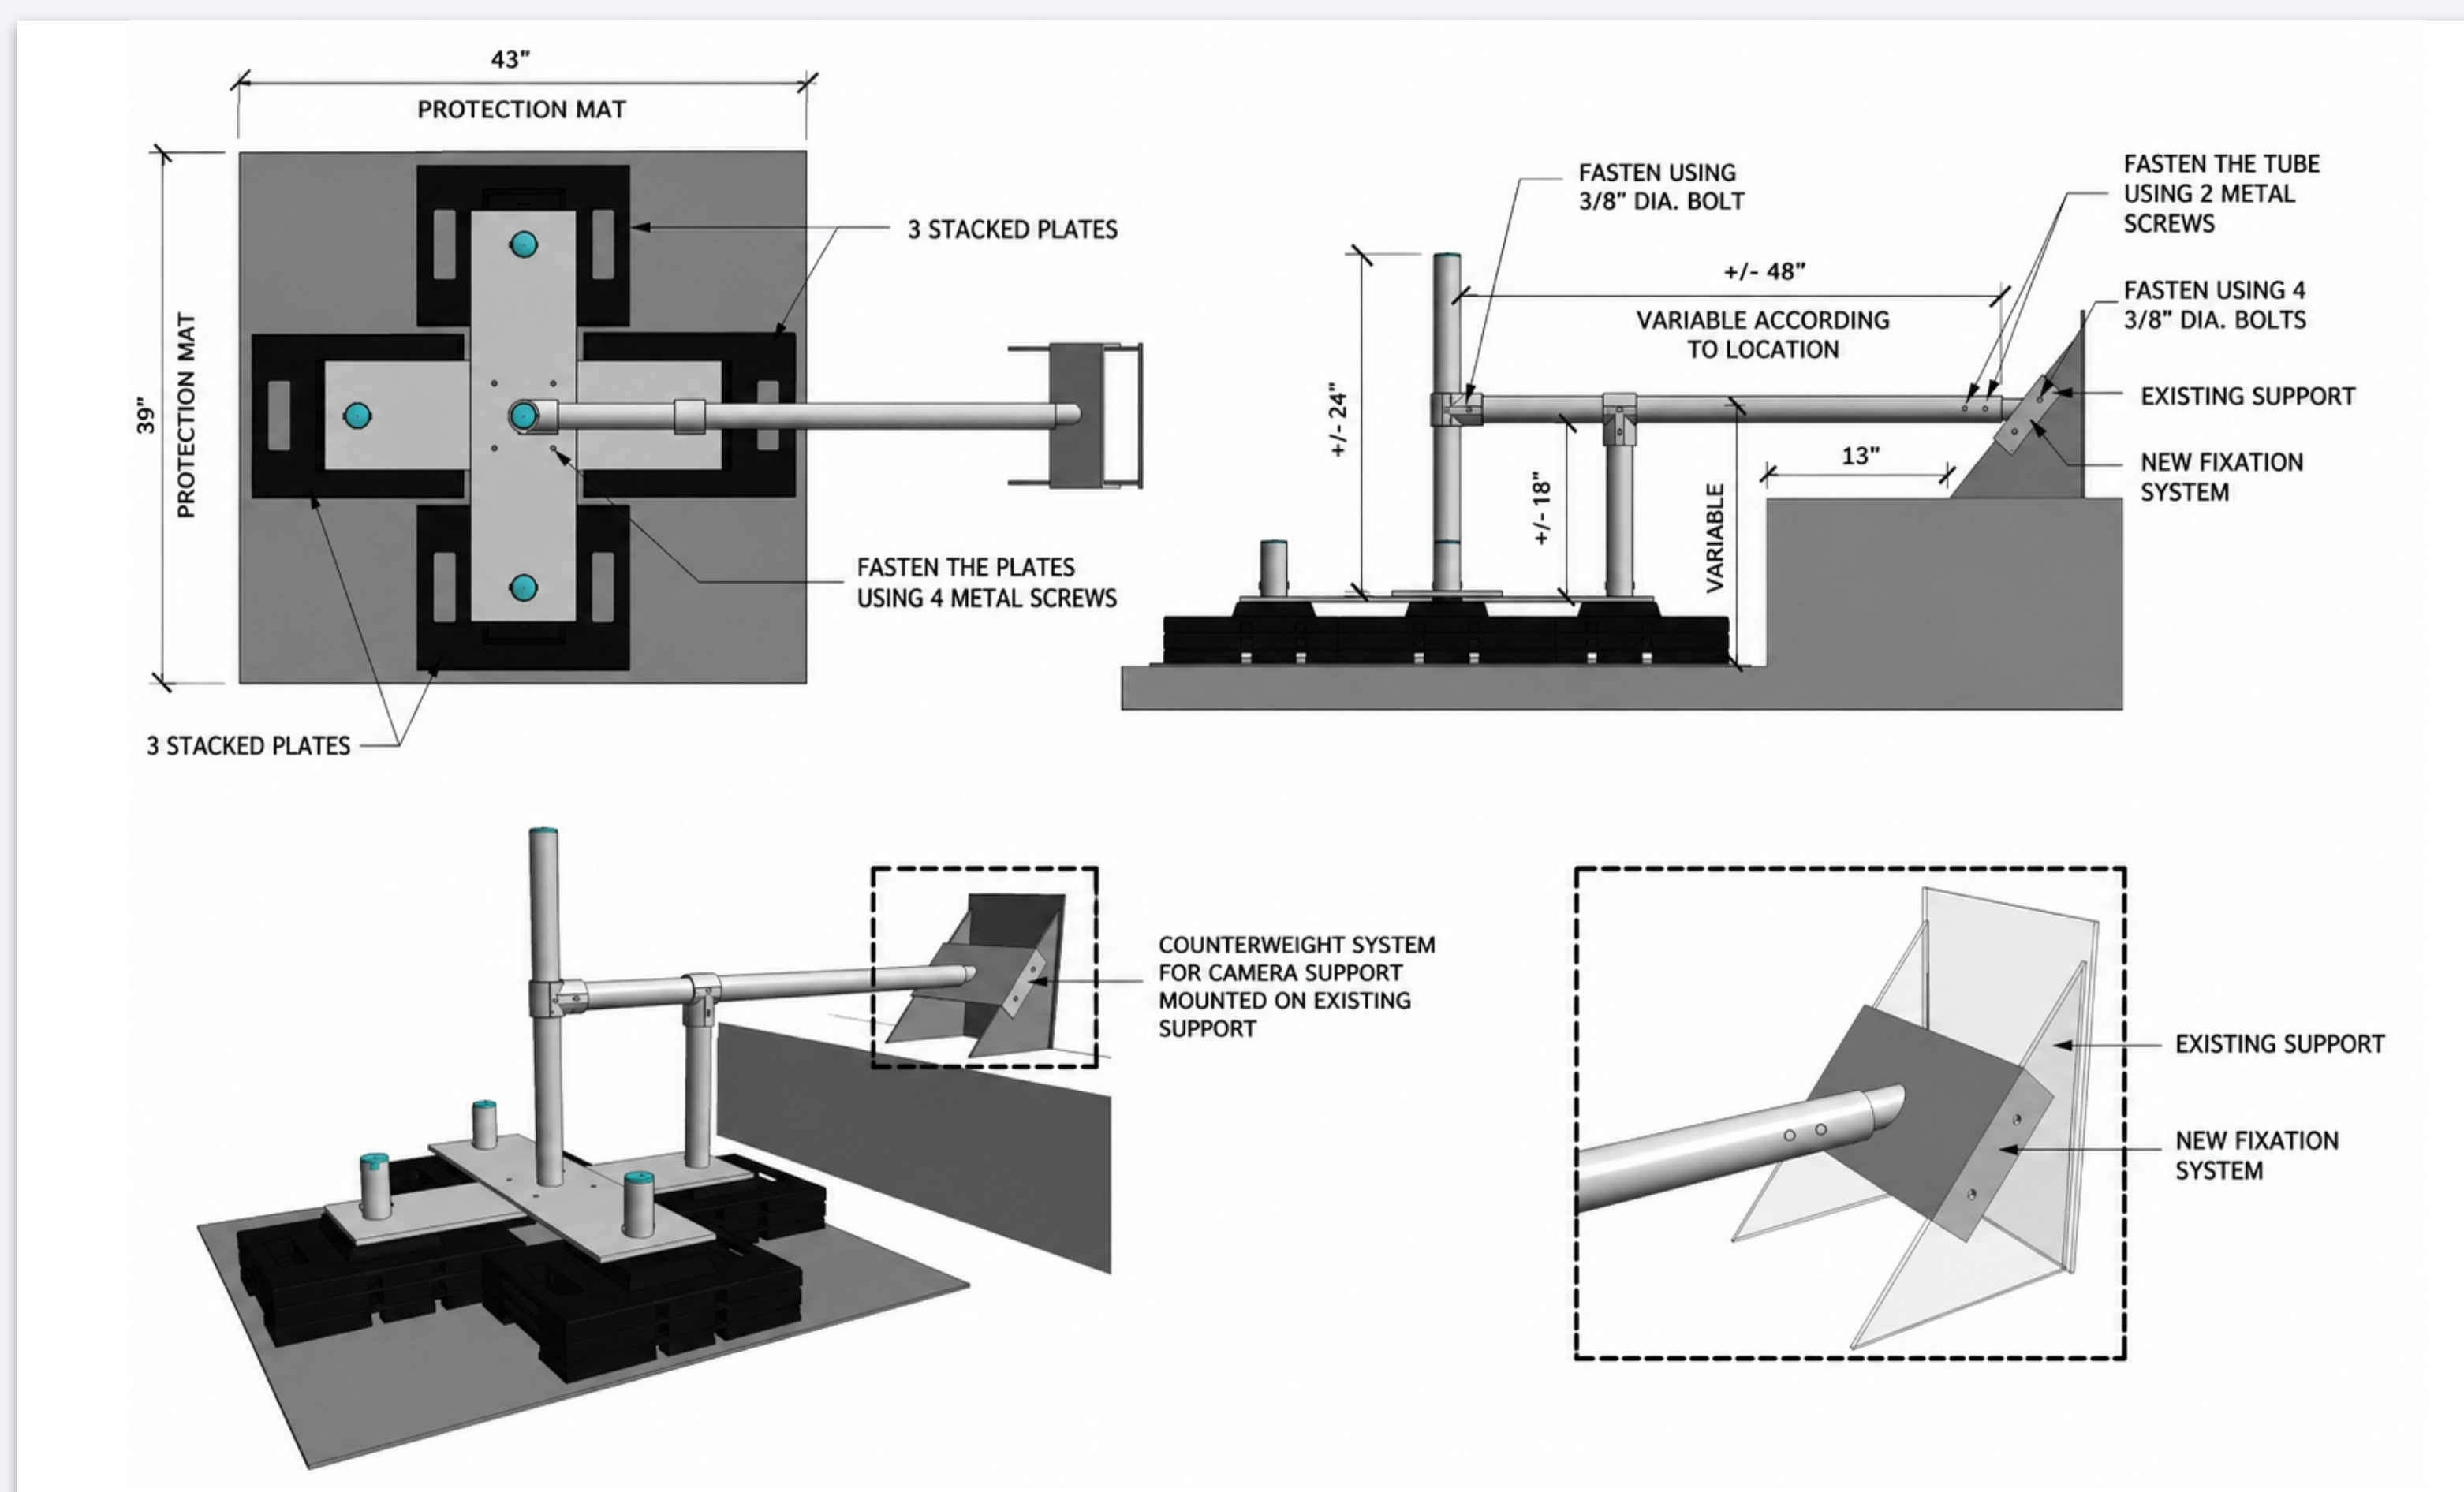

PRODUCT INFORMATION

General Description

The MILLENIUM Self-Supporting Mount – ACCESS Line is a technical solution designed for the secure installation of surveillance cameras on flat roofs or parapets, without compromising the integrity of the existing waterproofing membrane.

The system combines a weighted base with protective mat, a modular counterweight module, and an adjustable support structure allowing adaptation to architectural constraints and site climatic conditions.

System Components

Protective Base:

- Protective mat 43" x 39"
- Stacked plates (2 or 3 depending on configuration)
- Mechanical fastening with metal screws

Supporting Structure:

- Vertical mast $\pm 48''$ (variable depending on location)
- Vertical adjustment $\pm 24''$
- Horizontal arm variable $\pm 18''$
- Adjustable orientation

Fastening System:

- 3/8" diameter bolts
- Tube fastening with metal screws
- Module compatible with existing mount

Installation Methods

Self-supporting installation (standard): placement on protective mat, without roof membrane penetration.

Structural anchoring installation (if required): fastening to wall, parapet, or existing structure using 3/8" mechanical bolting, without membrane penetration.

Technical Specifications

Range	ACCESS Line
Type	Self-supporting system with counterweight
Roof Protection	Mat 43" x 39"
Stabilization	2 to 3 stacked plates
Fasteners	3/8" diameter bolts
Mast Height	± 48 » variable
Vertical Adjustment	± 24"
Horizontal Adjustment	± 18"
Compatibility	CCTV, IP, PTZ cameras

Applications

- Commercial rooftops
- Industrial buildings
- Institutional projects
- Temporary or permanent installations
- Wind-exposed sites

Technical Advantages

- Full preservation of roofing system waterproofing integrity
- Modular solution adaptable to architectural constraints
- Enhanced stability through counterweight system
- Quick installation and simplified maintenance
- Compatible with existing structures
- Manufactured under ISO 9001 certified quality management system
- Welding certified to CWB standards

The system includes a one (1) year warranty on paint finish and a ten (10) year warranty on all materials, effective from the date of purchase.